4TE精密ストレート圧着モールド：端子圧着金型・ダイ・アプリケーター

Model No. JW-AP17




SPECIFICATIONS

Model Number	4TE
Type	精密ストレート圧着モールド
Application	端子圧着
Compatibility	OTPモールド
Orientation	横型・縦型圧着対応

4TE精密ストレートモールド、端子圧着金型、端子圧着ダイ、端子圧着アプリケーター、OTP U字型金型、ターミナルマシンアプリケーター、OTPモールド、OTPターミナルモールド、 端子アプリケーターダイ OTPモールド 横型・縦型圧着モールド、端子アプリケーター、ダイ、OTPモールド、横型・縦型圧着モールド

4TS precision horizontal mold

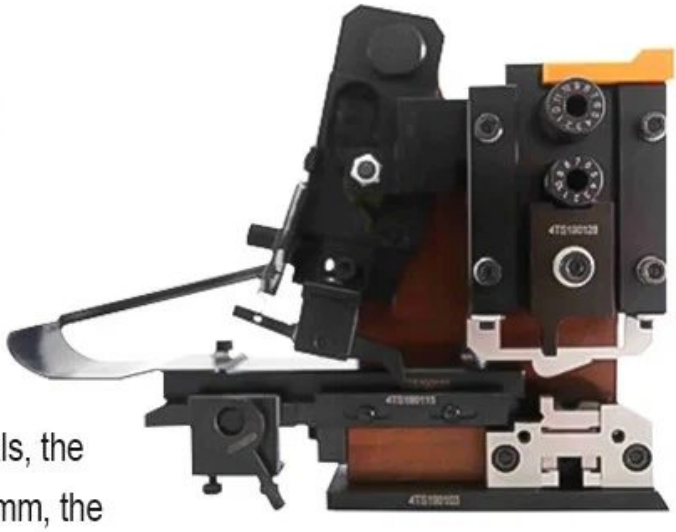

Feeding method: horizontal feed
Feeding stroke: 40mm
Slider stroke: 30mm
Scope of application: suitable for all kinds of large-stroke terminals, the large and fine adjustment is 0.025mm, the small and fine adjustment is 0.15mm, the upper knife width is 26mm, and the lower knife width is 30mm. Suitable for conventional terminal machines.

4TE precision straight mold



Feeding method: direct delivery
Feeding stroke: 40mm
Slider stroke: 30mm
Scope of application: suitable for all kinds of large-stroke terminals, the large and fine adjustment is 0.025mm, the small and fine adjustment is 0.15mm, the upper knife width is 26mm, and the lower knife width is 30mm. Suitable for conventional terminal machines.